



TECHNICAL DATA

Cycle times (*)	150 / 280 / 400 sec. and special cycles
Water consumption	8 l/rack
Tank capacity	80 l
Tank heating	3.3 kW
Power supply	400 / 50 / 3N
Booster loading	
Standard	15 kW
Reduced	9 kW
Total loading	
Standard	18.5 kW 3 x 35 A
Reduced	15.4 kW 3 x 25 A
Wash pump	2.7 kW
Rack size	600 x 760 mm
Loading height	860 mm
Noise level	65 dB (A)
Weight (gross / net)	236 / 221 kg

PRODUCT ADVANTAGES


- **Extra capacity by side wash system:** capacity up to 6 GN-trays 1/1 or 4 EN2 container
- **Detergent direct spraying system:** system soaks the wash ware following the detergent pre-washing cycle and softens even the most severely encrusted food residues what reduces the need for wash ware pre-soaking and pre-washing
- **Steam washing:** significantly less manual pre-cleaning and second runs by intensive wash cycles with steam injection
- **POWER-PLUS Washing:** high-pressure washing to wash heavily soiled wash items
- **ROTOR-X Wash System:** separate rotating upper and lower 4-spoke wash arms deliver dynamic wash power
- **PROOF Strainer Control:** prevents operation without tank strainer
- **SMARTRONIC Single-button Control:** colour coded status indication and remaining time indicator
- **VAPOSTOP Door System** (optional): prevents vapour to escape from machine when door is opened
- The optional **E-SAVE Drain Heat Recovery** transfers heat from hot drain water to the fresh-water supply, reducing boiler power consumption and saving up to 7.4 kW/h
- **GENIUS-X² Fine Filter System:** advanced filter system with pre-wash function reduces detergent consumption up to 35%
- **Loading height L:** above-average loading height of 860 mm
- The optional **exhaust heat recovery** with integrated Door System VAPOSTOP uses steam to heat fresh feed water and reduces the amount of power needed to reach the final rinse temperature, saving up to 4.5 kW/h
- **Hygiene Programme:** for removal of calcium carbonate and other deposits from wash chamber

CONNECTIONS

① Drain hose	2,000 mm ID20 / OD25
② Supply hose	2,000 mm R 3/4"
Flow pressure	0.8 - 10 bar
Max. supply water temperature	60 °C
Required flow rate	5 l/min
③ Power cord	1.800 mm
Supply hose for	
④ Detergent	2.500 mm
⑤ Rinse aid	2.500 mm

*Thermostop guarantees required temperatures with cold water connection, the actual cycle times extend accordingly.

DIMENSIONAL DRAWING

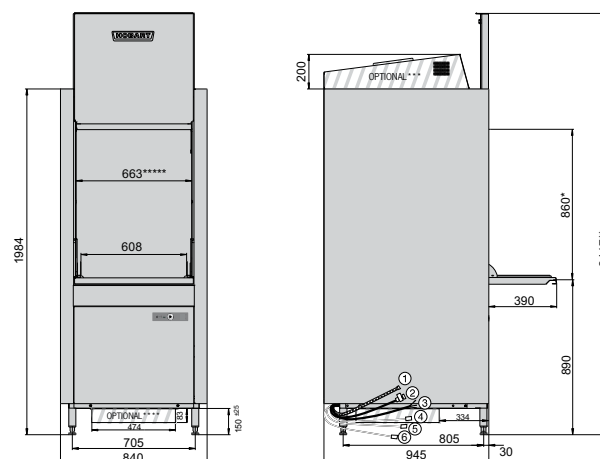

* Loading height can be reduced to 650 mm
 ** Height can be reduced to 2,200 mm with the door open
 *** with exhaust heat recovery
 **** with heat recovery
 ***** distance between lateral guide rails: 520 mm

