



## TECHNICAL DATA

Cycle times (*)	120 / 240 / 360 sec. and special cycles
Water consumption	8 l/rack
Tank capacity	130 l
Tank heating	6 kW
Power supply	400 / 50 / 3N
Booster loading	
Standard	15 kW
Reduced	9 kW
Total loading	
Standard	21.6 kW / 3 x 50 A
Reduced	15.7 kW / 3 x 35 A
Wash pump	2 x 2.7 kW   2 x 1,300 l/min
Rack size	1,240 x 700 mm
Loading height	880 mm
Noise level	68 dB (A)
Weight (gross / net)	452 / 432 kg

## PRODUCT ADVANTAGES


- **Loading height L:** above-average loading height of 880 mm (with rack 850 mm)
- **POWER-PLUS Washing:** high-pressure washing to wash heavily soiled wash items
- **ROTOR-X Wash System:** separate rotating upper and lower 4-spoke wash arms deliver dynamic wash power
- **PROOF Strainer Control:** prevents operation without tank strainer
- **SMARTRONIC Single-button Control:** colour coded status indication and remaining time indicator
- **Permanent wash programme:** due to a longer cycle time even heavily soiled wash items are getting perfectly clean
- The optional **E-SAVE Drain Heat Recovery** transfers heat from hot drain water to the fresh-water supply, reducing boiler power consumption and saving up to 12.9 kW/h
- **E-STORE Hood Concept:** the fully enclosed 4-sided hood keeps steam and energy inside the system: energy saving up to 5 kW/h; less humidity in the kitchen area and better hygienic conditions
- **GENIUS-X² Fine Filter System:** advanced filter system with pre-wash function reduces detergent consumption up to 35%
- **Hygiene Programme:** for removal of calcium carbonate and other deposits from wash chamber

## CONNECTIONS

① Drain hose	2,000 mm   ID20 / OD25
② Supply hose	2,000 mm   R 3/4"
Flow pressure	0.5 - 10 bar
Max. supply water temperature	60 °C
Required flow rate	5 l/min
③ Power cord	1.800 mm
Supply hose for	
④ Detergent	2.500 mm
⑤ Rinse aid	2.500 mm

\*Thermostop guarantees required temperatures with cold water connection, the actual cycle times extend accordingly. For machine protection the water hardness should not exceed 3°dH, if higher we recommend using an integrated water softener or an external water softener of the product line HYDROLINE PROTECT.

## DIMENSIONAL DRAWING

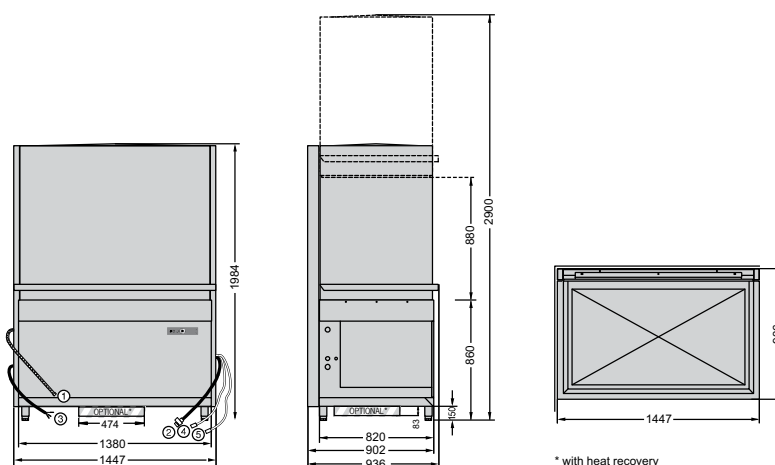

\* with heat recovery