

PRODUCT ADVANTAGES

TECHNICAL DATA

Cycle times (*)	60 / 90 / 120 sec. and special cycles
Water consumption	2 l/rack
Tank capacity	10,6 l
Tank heating	1,7 kW
Power supply	400 / 50 / 3N (230 / 50 / 1)
Booster loading	
Standard	6,2 kW
Alternative	2,1 kW
Total loading	
Standard	6,8 kW 3 x 13 A
Alternative	2,7 kW 13 A
Wash pump	0,5 kW
Rack size	500 x 500 mm
Loading height	305 mm
Noise level	60,5 dB (A)
Weight (gross / net)	70 / 60 kg

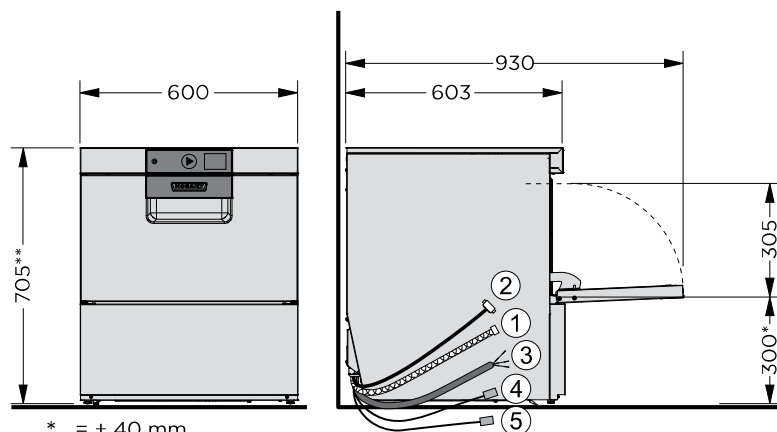
- **Compact glasswasher:** with an installation height of only 705 mm ideal for narrow places or with integrated reverse osmosis and an installation height of 820 mm ideal for undercounter installation.
- **VISIOTRONIC-TOUCH control:** single button control with colour code and remaining cycle time indication. With colour display and touch.
- **WASHSMART APP:** controlling your warewash operation with smart technology: status and messages, usage and operating cost, hygiene, order service and consumables
- **SENSO-ACTIVE resource management:** constantly measures the quality of the wash water and keeps the amount of rinsing needed in each rinse cycle to the minimum in order to guarantee a fully hygienic wash result
- **CLIP-IN wash and rinse arms:** wash and rinse arms can be removed with one hand and without any tools
- **Intelligent data documentation:** automatic recording of important operational data and consumptions and indication on the display
- **USB-interface:** comfortable download of operational data in form of a protocol via USB
- **GENIUS-X² fine filter system:** advanced filter system with pre-wash function reduces detergent consumption up to 35%
- **Intensive programme:** intensive rinse cycle to wash glasses with critical design with raised fresh-water amount
- **Interlocked strainer:** prevents operation without tank strainer
- **Optional refill signal:** monitors contents of external as well as integrated chemical containers
- **Hygiene programme:** for removal of calcium carbonate and other deposits from wash chamber

*Thermostop guarantees required temperatures with cold water and / or 230 V connection, the actual cycle times extend accordingly.

For machine protection the water hardness should not exceed 3°dH, if higher we recommend using an integrated water softener or an external water softener of the product line HYDROLINE PROTECT.

CONNECTIONS

① Drain hose	2,000 mm ID20/ OD25
② Supply hose	2,000 mm R 3/4"
Required flow rate	5 l/min
Flow pressure	0,5 (0,8 with softener) - 10 bar
Max. supply water temperature	60 °C
③ Power cord	2.000 mm
Supply hose for	
④ Detergent	2.500 mm
⑤ Rinse aid	2.500 mm

DIMENSIONAL DRAWING


* = + 40 mm

** = 820 mm with integrated osmosis

